


## Getting Started with the TS-SER1

The TS-SER1 is a PC/104 daughter card that provides one PC compatible COM port capable of running up to 115K baud\*.

- COM port and IRQ are jumper selectable (IRQ4, 5, 6, 7 & 9 available)
- 16C550 UART with 16 byte FIFO is industry standard
- All RS-232 signals are supported ( RX, TX, RTS, CTS, DSR, DCD, DTR, RI)

\* faster or non-standard baud rates available

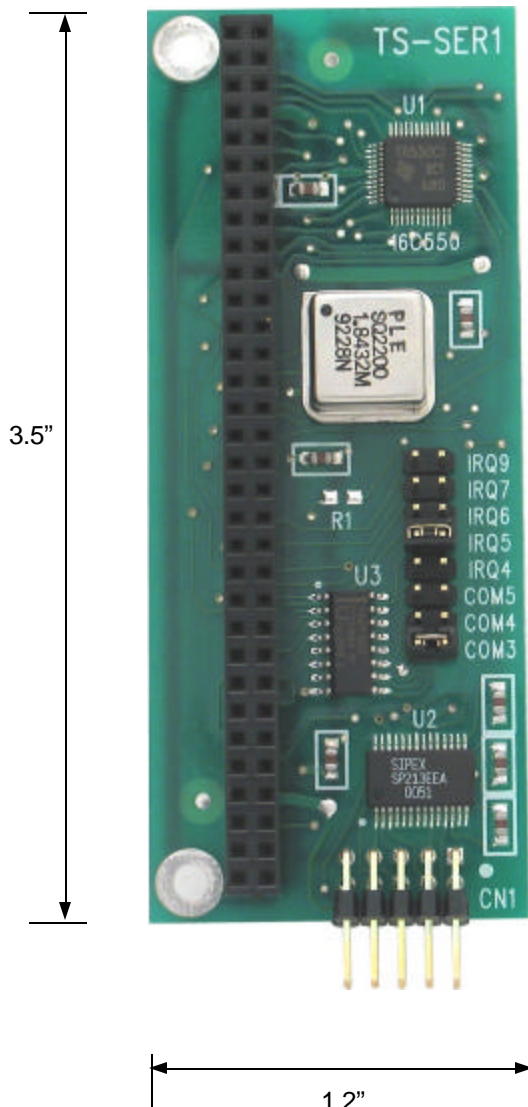

COM Port	I/O Address
COM3	0x3E8
COM4	0x2E8
COM5	0x3A8

Pin Number	Signal Name
1	DCD
2	Receive Data
3	Transmit Data
4	DTR
5	Signal Ground
6	DSR
7	RTS
8	CTS
9	RI

